



Fresh Maker · IW 45

Automatic ice cube maker with chilled water dispenser.

Quality cubes: compact, cold and crystalline.

Continuous supply of cold water for unlimited use. The FRESH MAKER for its small size, fits easily any furnishings, even domestic. The ICE WATER is suitable for canteens, self-services and other large catering structures.

Produttori automatici di ghiaccio in cubetti con distributore di acqua raffreddata.

Cubetti di qualità: compatti, freddi e cristallini.

Acqua fresca in continuo, per un uso a volontà. Il FRESH MAKER per le sue dimensioni ridotte, è facilmente inseribile in arredamenti anche domestici. Il modello ICE WATER è adatto per mense, self-service, comunità.




Fresh Maker




IW 45



Fresh Maker · IW 45

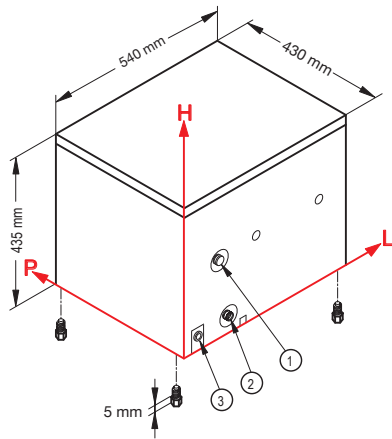

Fresh Maker

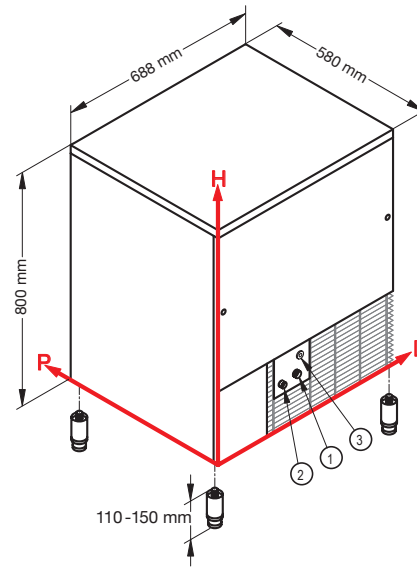

IW 45

CONNECTIONS / CONNESSIONI	Fresh Maker			IW 45		
	L	H	Ø	L	H	Ø
① Water inlet / Ingresso acqua	120	215	3/4"	299	196	3/4"
② Water outlet / Scarico acqua	150	40	24 mm	237	151	24 mm
③ Electrical connection / Connessione elettrica	44	40	-	344	232	-

TECHNICAL INFORMATION / DATI TECNICI	Fresh Maker	IW 45
Production in 24 h / Produzione in 24 h	21 kg	42 kg
Storage capacity up to / Capacità contenitore fino a	4 kg ≈ 310 □	25 kg ≈ 1470 □
Water delivery / Acqua erogata	1,2 l/min	2 l/min
Cooling system / Condensazione	W	A - W
Kind of cube / Tipo di cubetto	D-13g	A-18g C-33g D-13g E-42g
Refrigerant / Refrigerante	R404A	R404A
Standard voltage / Voltaggio standard	220-240 V ~ 50 Hz	220-240 V ~ 50 Hz
Electrical consumption / Consumo elettrico	320 W	450 W
Fuse / Fusibile	10 A	10 A
Water consumption (l/kg) / Consumo acqua (l/kg)	W 37,4	A 4 W 15
Sizes (WxDxH) / Dimensioni [LxPxH]	540x430x435 mm	688x580x800 mm
Sizes with packing (WxDxH) / Dimensioni con imballo [LxPxH]	590x490x640 mm	730x620x960 mm
Weight (net/gross) / Peso [netto/lordo]	37,5/42,5 Kg	71/80 kg

Finishing 18/8 stainless steel, scotch brite / Finitura acciaio inox 18/8, scotch brite

Gli apparecchi sono da considerarsi in Classe tropicale (Temperatura ambiente fino a 43°C). / The equipment are to be considered in tropical class (ambient temperature up to 43 °C).

INSTALLATION CONDITIONS / CONDIZIONI D'INSTALLAZIONE	Min / Max
Installation / Installazione	indoor / interna
Ambient temperature / Temperatura ambiente	+10 / +43 °C
Water temperature / Temperatura acqua	+3 / +32 °C
Voltage / Voltaggio	± 10%
Water inlet pressure / Pressione dell'acqua in ingresso	1bar (14psi) / 6bar (84psi)

CONDITIONS / CONDIZIONI	
Standard Cube / Cubetto standard	FM 13g IW 45 18g
Ambient temperature / Temperatura ambiente	+21°C
Water temperature / Temperatura acqua	+15°C
Electrical consumption at +43°C (standard voltage) / Consumo elettrico a +43°C (voltaggio standard)	